


# Resident

## Circus 250 Pendant - Black

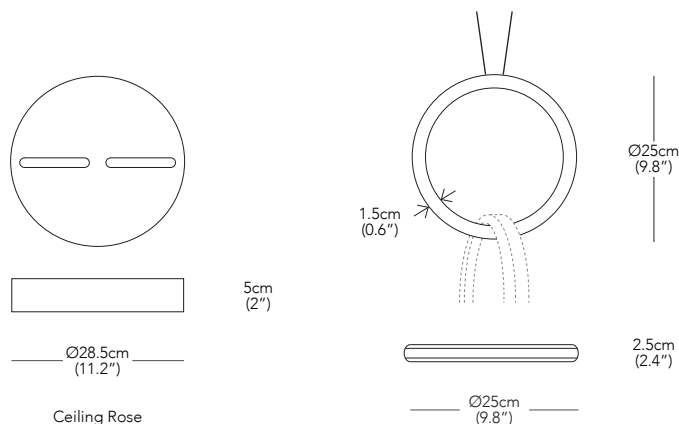

DESIGNER  
Resident Studio / 2021

PRODUCT DESCRIPTION  
Pendant Light

### PRODUCT CODE

CIR012B - Circus 250 Pendant, Black, 2 Rings  
CIR013B - Circus 250 Pendant, Black, 3 Rings  
CIR014B - Circus 250 Pendant, Black, 4 Rings  
CIR015B - Circus 250 Pendant, Black, 5 Rings  
CIR016B - Circus 250 Pendant, Black, 6 Rings

CIR017B - Circus 250 Pendant, Black, 7 Rings  
CIR018B - Circus 250 Pendant, Black, 8 Rings  
CIR019B - Circus 250 Pendant, Black, 9 Rings  
CIR020B - Circus 250 Pendant, Black, 10 Rings  
CIR021B - Circus 250 Pendant, Black, 11 Rings

\* Components drawn in relative scale. Refer to CAD files for accurate drawings.

### MATERIALS

Aluminium, Acrylic

### COLOUR

Matt Black

### PRODUCT ENVIRONMENT

Indoor Use Only

### APPROPRIATE FOR HARD CONTRACT USE

Yes

### CERTIFICATION

CE

### WARRANTY

3 Years

### PACKAGED DIMENSIONS

1 Box Per Light

W	D	H	
55 x 62 x 19cm			2 Rings
21.7 x 24.4 x 7.5"			0.06 m <sup>3</sup>
			2.12 ft <sup>3</sup>
55 x 62 x 108.5cm			11 Rings
21.7 x 24.4 x 42.7"			0.37 m <sup>3</sup>
			13.1 ft <sup>3</sup>

### PACKAGED WEIGHT

2 Rings	11 Rings
5.3 kg	11.0 kg
11.7 lbs	24.3 lbs

### PRODUCT WEIGHT

2 Rings	11 Rings
2.7 kg	5.4 kg
6.0 lbs	11.9 lbs

### DIMMING

The Circus 250 Pendant is dimmable as standard with a 0-10V receiver. The dimming options below are an additional purchase.

Compatible with the standard driver:

DIM002 - Dimmer with Wall Switch

Dimmable drivers replacing the standard driver:

Universal Ac, Triac And Trailing Edge Dimming:

DRI17 - 240W Phasecut Dimmable Driver (EU) (≤11 Rings)

DRI18 - 240W Phasecut Dimmable Driver (US) (≤11 Rings)

Dali Systems:

DRI13 - 75W Dimmable Dali Driver (≤3 Rings)

DRI14 - 150W Dimmable Dali Driver (≤7 Rings)

### LIGHT SOURCE

Voltage - 24V

Power Usage - 19.2W Per Ring

Lumens - 2304lm Per Ring

Colour Temperature - 3000K

CRI - 95

Average Lifespan - 50,000Hrs

### CEILING ROSE

Matt Black Aluminium

### CABLE LENGTH


Min 30cm (12") - Max 500cm (196.9")

### COUNTRY OF ORIGIN

New Zealand

# Resident

## Circus 250 Pendant - Brass

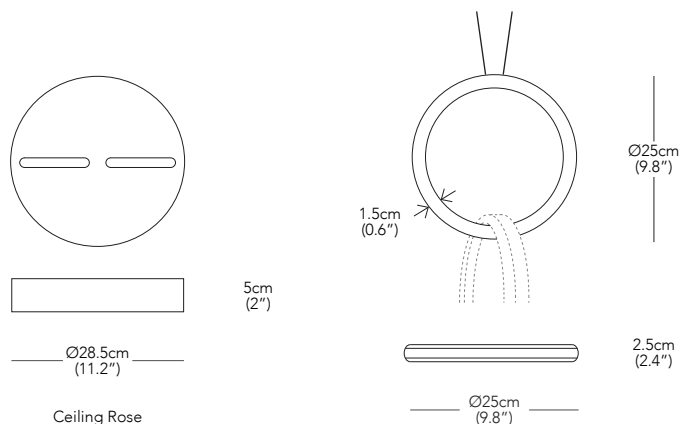

DESIGNER  
Resident Studio / 2018

PRODUCT DESCRIPTION  
Pendant Light

### PRODUCT CODE

CIR012BR - Circus 250 Pendant, Brass, 2 Rings  
CIR013BR - Circus 250 Pendant, Brass, 3 Rings  
CIR014BR - Circus 250 Pendant, Brass, 4 Rings  
CIR015BR - Circus 250 Pendant, Brass, 5 Rings  
CIR016BR - Circus 250 Pendant, Brass, 6 Rings

CIR017BR - Circus 250 Pendant, Brass, 7 Rings  
CIR018BR - Circus 250 Pendant, Brass, 8 Rings  
CIR019BR - Circus 250 Pendant, Brass, 9 Rings  
CIR020BR - Circus 250 Pendant, Brass, 10 Rings  
CIR021BR - Circus 250 Pendant, Brass, 11 Rings

\* Components drawn in relative scale. Refer to CAD files for accurate drawings.

MATERIALS  
Brass, Acrylic

COLOUR  
Raw Brushed Brass

PRODUCT ENVIRONMENT  
Indoor Use Only

APPROPRIATE FOR HARD CONTRACT USE  
Yes

CERTIFICATION  
CE

WARRANTY  
3 Years

PACKAGED DIMENSIONS  
1 Box Per Light

W	D	H	
55	62	19	2 Rings
21.7	24.4	7.5	0.06 m <sup>3</sup>
21.7	24.4	7.5	2.12 ft <sup>3</sup>
W	D	H	
55	62	108.5	11 Rings
21.7	24.4	42.7	0.37 m <sup>3</sup>
21.7	24.4	42.7	13.1 ft <sup>3</sup>

PACKAGED WEIGHT

2 Rings	11 Rings
6.1 kg	15.4 kg
13.5 lbs	34.0 lbs

PRODUCT WEIGHT

2 Rings	11 Rings
3.5 kg	9.8 kg
7.7 lbs	21.6 lbs

### DIMMING

The Circus 250 Pendant is dimmable as standard with a 0-10V receiver. The dimming options below are an additional purchase.

Compatible with the standard driver:  
DIM002 - Dimmer with Wall Switch

Dimmable drivers replacing the standard driver:  
Universal Ac, Triac And Trailing Edge Dimming:  
DRI17 - 240W Phasecut Dimmable Driver (EU) (≤11 Rings)  
DRI18 - 240W Phasecut Dimmable Driver (US) (≤11 Rings)  
Dali Systems:  
DRI13 - 75W Dimmable Dali Driver (≤3 Rings)  
DRI14 - 150W Dimmable Dali Driver (≤7 Rings)

### LIGHT SOURCE

Voltage - 24V  
Power Usage - 19.2W Per Ring  
Lumens - 2304lm Per Ring  
Colour Temperature - 3000K  
CRI - 95  
Average Lifespan - 50,000Hrs

CEILING ROSE  
Matt Black Aluminium

CABLE LENGTH  
Min 30cm (12") - Max 500cm (196.9")

COUNTRY OF ORIGIN  
New Zealand